

Blast chiller cell for catering

LAINOX®
Cooking System

C 02

20 x 1/1 GN

GENERAL FEATURES

- Outside stainless steel AISI 304 18/10 mm Scotch-Brite satin finish
- Inside stainless steel AISI 304 18/10 with rounded corners
- Inside bottom and floor die-formed leakproof
- High-density expanded polyurethane insulation (about 42 kg/m³) with thickness of 80 mm, without HCFC
- Copper - aluminum evaporator, protected with non - toxic epoxy resins through cataphoresis painting systems
- Anti-condensation heating element fitted on the door under the gasket
- Horizontal ergonomic handle with inside security lock
- Door with rubber sweeper gasket with closing hinges
- Door with lock
- Heated core probe in blast freezer for an easy extraction

INTERNAL SET-UP

- Internal bumpers in stainless steel to prevent damage by trolleys
- External guards in stainless steel to prevent damage to control panel

COOLING UNIT


- Remote condensing unit and possibility to have stainless steel protective cover
- Evaporator fitted with high rate fan for maximum cooling efficiency
- R404A refrigerant liquid

COMMANDS, CONTROLS AND SAFETY DEVICES

- Control and command circuit board equipped with high-visibility custom display, which highlights the status of the appliance at all times
- The T version can memorise up to 99 programs, can store any HACCP alarms in the memory and control up to 4 needle or 4 sensors (optional)
- Compressor protected by overload cut-out with automatic reset
- Microswitch cuts out the evaporator fan and compressor when the door is opened

OPTIONS / ACCESSORIES

- Condensing unit with water cooling unit
- Cover for condensing unit
- Version without floor (with rubber sweeper gasket)
- Sterilizing kit with removable steriliser Sterilox model
- Printer kit

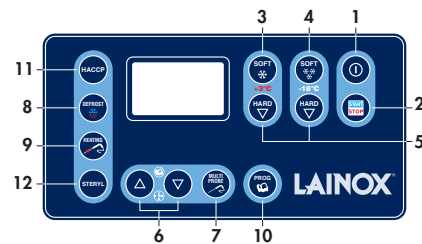

T VERSION

- 1 - Main switch ON/OFF
- 2 - Start/Stop of a chilling phase
- 3 - Select chilling +3°C SOFT
- 4 - Select freeze -18°C SOFT
- 5 - Select HARD chilling (+3°C) or freeze (-18°C) cycle
- 6 - Time or chilling/freeze cycle setting
- 7 - Select for chilling/freeze cycle per probe
- 8 - Display of temperature of evaporator probe during operation. Start defrosting (with unit in STOP mode) with long press
- 9 - Heating for shaft probe extraction (for freezing programmes)
- 10 - Recall or store programmes
- 11 - Recall HACCP alarms, showing them on display, including date, duration, type and maximum temperature reached
- 12 - Start of sterilization process

Blast chiller cell for catering

LAINOX[®]
Cooking System

C 02

20 x 1/1 GN

Model		RCR C02	RCM C02
Control type		T	T
Dimensions (W x D x A)	mm	1200 x 1150 x 2230	1200 x 1150 x 2230
Depth with 90° door	mm	1880	1880
Door opening width	mm	700	700
Door opening	mm	670 x 1920	670 x 1920
Internal depth	mm	850	850
Thickness	mm	80	80
Climatic class		T	T
Chilling cycle	°C	+90 → +3	+90 → +3
Freezing cycle	°C	-	+90 → -18
Chilling capacity	90' kg	105	105
Freezing capacity	240' kg	-	70
Electric power supply	V/~ / Hz	230 / 1 / 50	230 / 1 / 50
Input electric power	(°) W	550	550
Max. absorbed current	(°) A	3,7	3,7
Setting up		1 trolley 1/1 GN	1 trolley 1/1 GN
Packing dimensions	mm	2330 x 1250 x 1350	2330 x 1250 x 1350
Volume	m ³	4,18	4,18
Weight - net / gross	kg	310 / 390	310 / 390
REMOTE UNIT			
Rated output	HP	4	5
Refrigerante	gas	R404A	R404A
Refrigeration capacity	(*) W	9620	6750
Electric power supply	V/~ / Hz	400 / 3 / 50	400 / 3 / 50
Input electric power	(°) W	4740	4960
Max. absorbed current	(°) A	10,9	12,2
Weight	kg	132	134
Dimensions	mm	1004 x 700 x 650	1004 x 700 x 650
CONNECTIONS (max distance 20 m)			
Electrical cables	n° x mm ²	5 x 1,5	5 x 1,5
Liquid tubes	Ø mm	12	14
Gas tubes	Ø mm	28	28
Drain connection water UMC	Ø "	out coil ¾ → ½ conn. H2O	out coil ¾ → ½ conn. H2O
Max water consumption	(•) l/mm	13,9	11,3
Drain tubes	Ø "	1"	1"
LP-HP set (differential)	bar	0 (0.5) - 26 (3)	0 (0.5) - 26 (3)

for Mod. ___ R ___ (*) temp. evap. -10°C temp. cond. +45°C / (°) temp. evap. 0°C temp. cond. +55°C

for Mod. ___ M ___ (*) temp. evap. -25°C temp. cond. +45°C / (°) temp. evap. -10°C temp. cond. +55°C




(•) t in = 20 °C / t out = 40 °C

Blast chiller cell for catering

LAINOX
Cooking System

C 02

20 x 1/1 GN

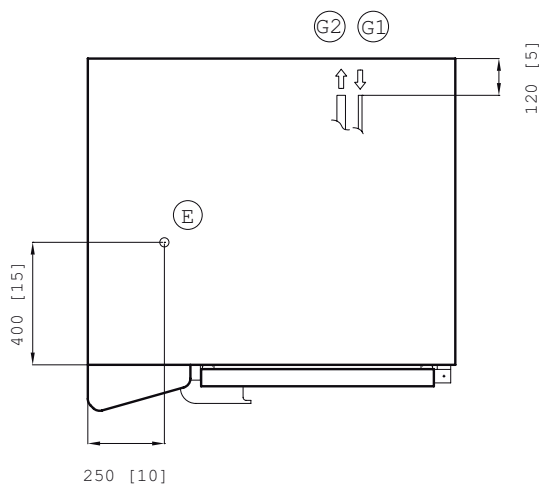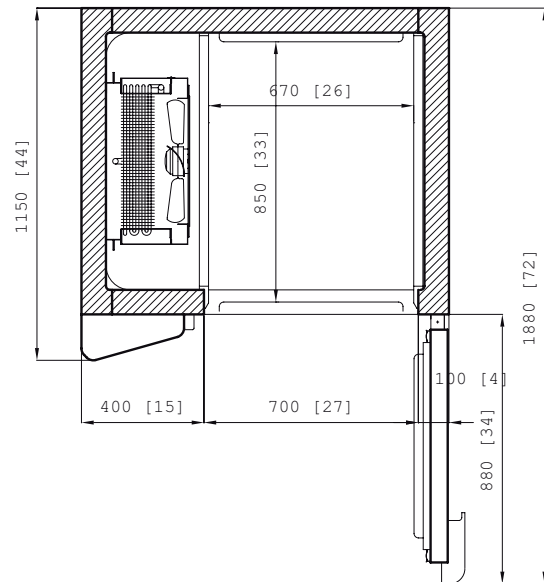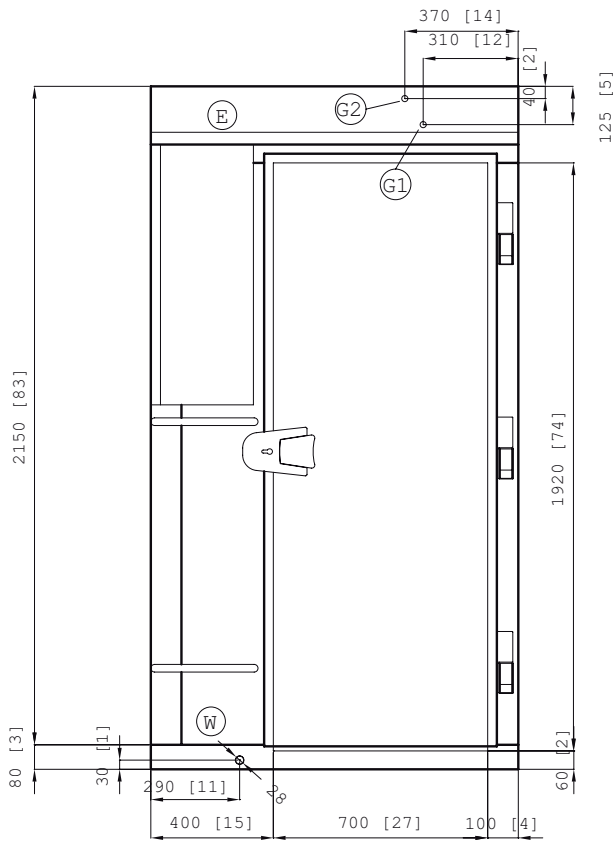

- Ⓒ1 INGRESSO REFRIGERANTE
REFRIGERANT INLET
 - Ⓒ2 USCITA REFRIGERANTE
REFRIGERANT OUTLET
 - Ⓔ CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION
 - ⒲ CONNESSIONE IDRICA
DRAIN CONNECTION
- DIMENSIONI mm
DIMENSIONS [in]

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento. The specifications shown in this document are to be considered not binding. The company reserves the right to make technical changes at any moment. Die auf dieser Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen.
Die Firma behält sich das Recht vor zu jeder zeit technische Änderungen vorzunehmen. Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment. Los datos técnicos indicados en el presente catálogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.